


| SERIES | MODEL | CONFIGURATION | SEAL TYPE |
|------------|----------------|---|--|
| Max-Series | M0, M1, M2, M3 | Sealed Gear Pump Close-Coupled with RF Flanges. | Single Mechanical Seal or Double Mechanical Seal |

UNITS: inches [mm]

| MOTOR | "A" | "B" | "C" | "D" | "E" | "F" | "G" | "H" |
|-----------|--------------|--------------|--------------|--------------|-------------|---------------|--------------|--------------|
| 56C | 9.02 [229.0] | 7.32 [186.0] | 5.75 [146.1] | 4.00 [101.6] | 3.50 [88.9] | 9.89 [251.1] | 3.00 [76.2] | 4.88 [123.8] |
| 143/145TC | 9.02 [229.0] | 7.32 [186.0] | 5.75 [146.1] | 4.00 [101.6] | 3.50 [88.9] | 10.20 [259.0] | 4.00 [101.6] | 5.50 [139.7] |
| IEC 71 B5 | 9.02 [229.0] | 7.32 [186.0] | 5.05 [128.1] | 3.30 [83.7] | 2.80 [71.0] | 9.09 [231.0] | 3.54 [90.0] | 4.41 [112.0] |
| IEC 80 B5 | 9.02 [229.0] | 7.32 [186.0] | 5.40 [137.1] | 3.65 [92.7] | 3.15 [80.0] | 9.29 [236.0] | 3.94 [100.0] | 4.92 [125.0] |
| IEC 90 B5 | 9.02 [229.0] | 7.32 [186.0] | 5.79 [147.1] | 4.04 [102.7] | 3.54 [90.0] | 9.53 [242.0] | 3.94 [100.0] | 5.51 [140.0] |

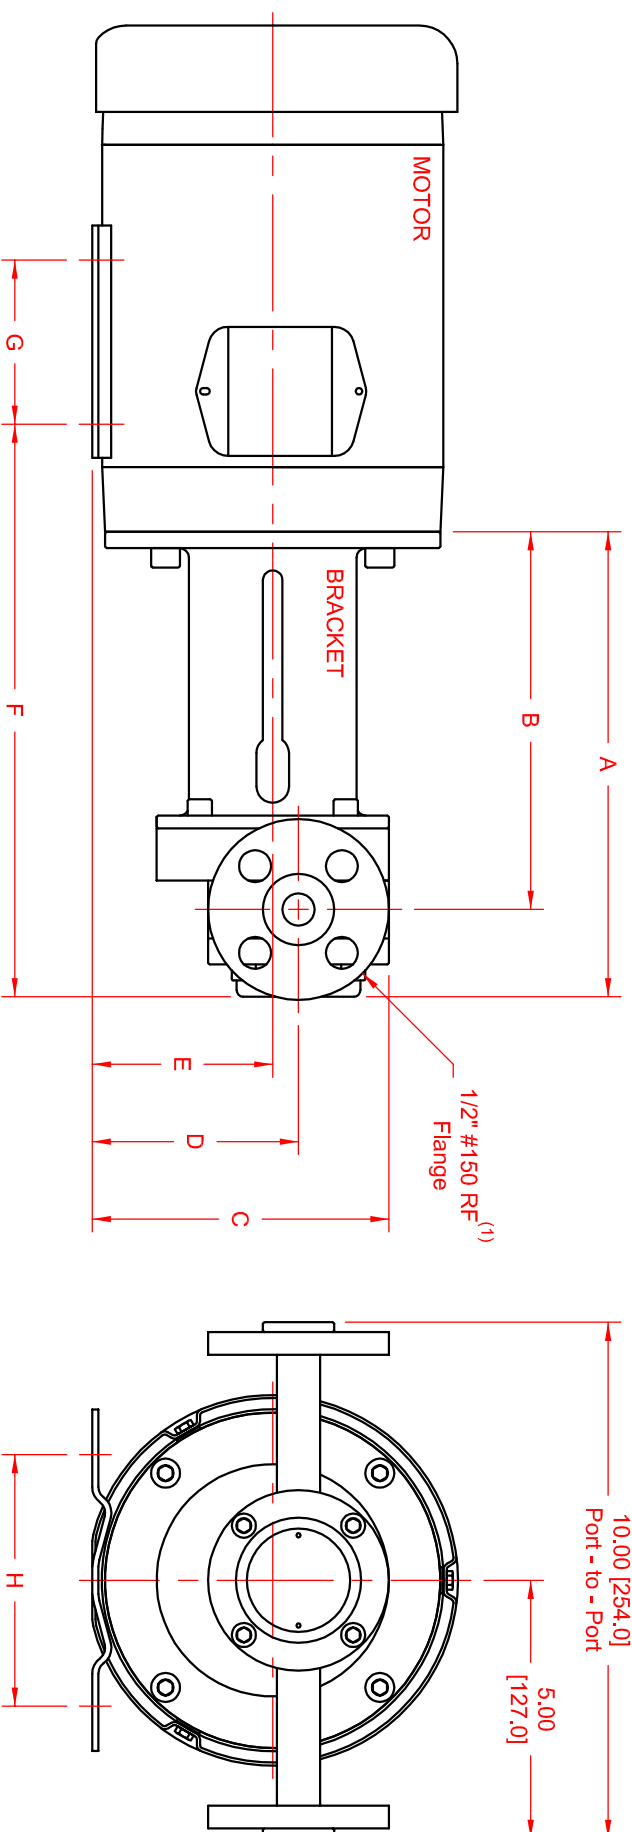

NOTES:

1) Also available with ANSI 1/2" #300 RF and DN10 PN16 flanges.